



330

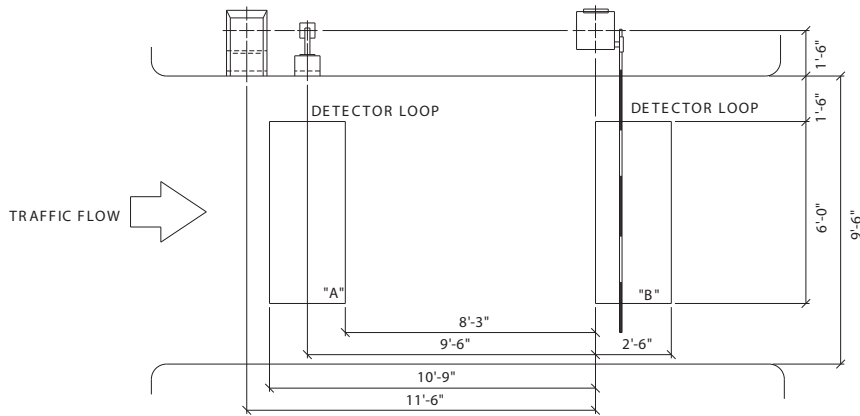

EQUIPMENT LEGEND



ALL CONDUIT, INCLUDING LOOP LEAD IN, MUST STUB UP 2"-3"(50.8mm-76.2mm) ABOVE EQUIPMENT MOUNTING SURFACE.

ALL DETECTOR LOOPS SHALL HAVE 5 TURNS UNLESS OTHERWISE NOTED AND SHALL NOT BE INSTALLED ACROSS LATERAL EXPANSION OR CONSTRUCTION JOINTS.

** CAUTION **
CONTROL AND POWER RUNS MUST BE 18"(0.46m) MINIMUM AWAY FROM DETECTOR LOOPS.

POWER CURRENT SPECIFICATIONS: THE POWER CIRCUIT WIRE GAUGE SHALL BE CAPABLE OF CONTINUOUSLY SUPPLYING THE SPECIFIED CURRENT AT THE LOCATION OF THE EQUIPMENT AND MAINTAIN 115VAC +OR- 3%AT LOAD.

POWER WIRES MUST BE 90 DEGREES C - 194 DEGREES F.

NOTE:
A - CONDUIT AREA - STUB 2" (50.8 mm) ABOVE SURFACE.
B - HOLES 3/4"(19.1mm) DIA
* - CENTER LINE OF CASHIERING POINT.

ALL AC POWER RUNS SHALL CONSIST OF THREE WIRES:

- 1 - HOT
- 1 - NEUTRAL
- 1 - GROUND CONDUCTOR

THE GROUND CONDUCTOR SHALL BE PULLED FROM THE SERVICE PANEL.

CAUTION
AUTOS ONLY
NO MOTORCYCLES, BICYCLES
OR PEDESTRIANS



Total Parking Solutions, Inc.

2721 Curtiss St. Downers Grove, IL 60515

Tel (630) 241-1984 Fax (630) 241-1985

PROJECT:

DESC:

TICKET/CARD ENTRANCE

SCALE: NONE

DATE: 05/11/05

DWG BY: vic

W.O.#

DRAWING # 330